


## Features

- Various relays, including LED
- 15A Transfer Contacts
- 1Z, 2Z, 3Z, 4Z Contact operating form
- Various Terminals Available
- Transparent dust-proof cover, Various mounting types
- Various sockets available
- Including LED, test button

## General-Purpose Relay

JQX-13F

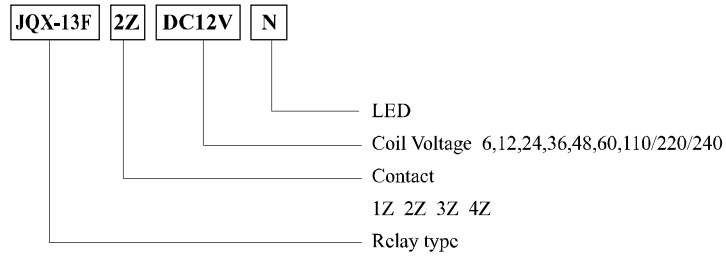

JQX-13F(LY2)



LY3



LY4

## Contact Ratings

Contact Ratings	1Z	2Z 3Z 4Z
Contact Resistance	50mΩ(1A 6VDC)	
Contact capacity	10A250VAC/28VDC	10A 250VAC/28VDC

## Specification

Insulation Resistance	500MΩ		
Dielectric Strength	BCC	1000VAC 1 Min	
	BOC	1500VAC 1 Min	
	COC	1500VAC 1 Min	
Operate Time	25ms /25ms		
Terminal Type	PCD & Socket		

## Coil Ratings

Nominal Coil Power	0.9W/1.2VA
--------------------	------------

## Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω:±10%
5	4.0	0.50	30
6	4.8	0.60	40
12	9.6	1.20	160
24	19.2	2.40	640
48	38.4	4.80	2500
110	88.0	11.0	12100


## Coil Versions

Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance $\Omega$ : $\pm 10\%$
6	4.80	1.80	12
12	9.60	3.60	42
24	19.2	7.20	168
48	38.4	14.4	675
110	96.0	36.0	3500
220/240	176.0	66.0	14000/16500

Socket type




PTF-08A



PTF14A

## Dimension.Bottom View

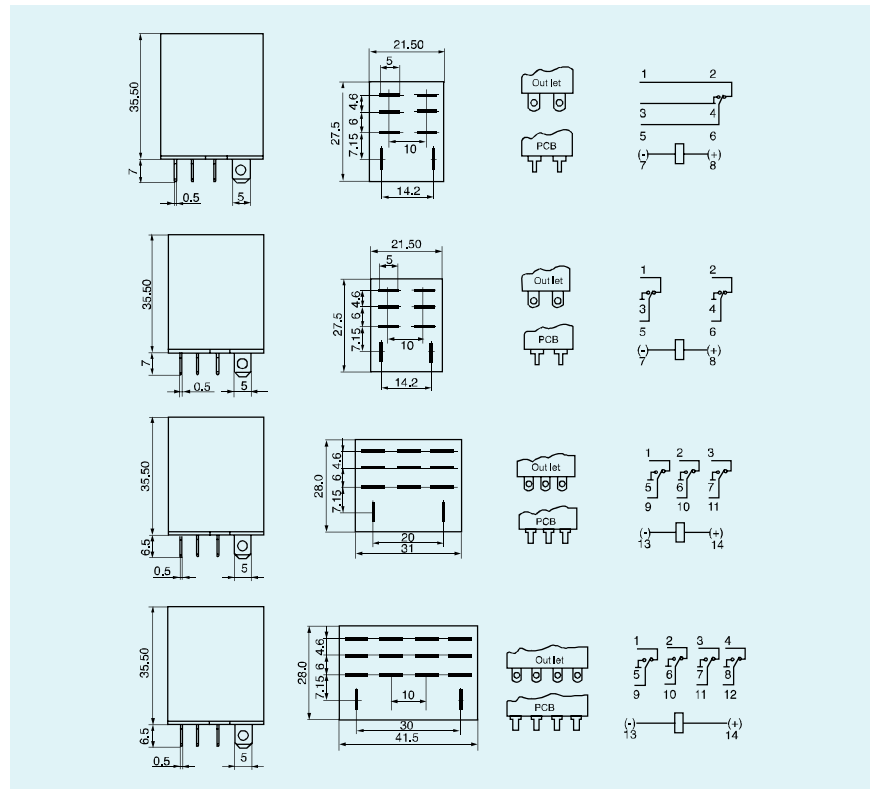

## Reference Data

