

50w 600mA
+dim


LED DRIVER HG-PC-D42AD

Characteristic


- Galvanic Isolation
- Efficiency > 89%
- Power - 30W

Technical Parameter


Input characteristic		
Input Voltage Range	V	100–260
Power consumption range	W	32. 4–51
Frequency	Hz	50–60
Power factor correction (λ , AC 220V)	%	0. 5
Efficiency	%	89%
Input Current (AC230V 50–60Hz)	A	<0. 5
Output characteristic		
Output current regulation (dimming)		yes
Dimming characteristic linearity	%	–
Output current tolerance	%	<5%
Output Ripple	%	<2%
Current	mA	150–600
Power	W	20
Voltage	V	54–85
No load voltage	V	90
Protection		
Short circuit protection		yes
Oversupply protection		yes
Overload protection		yes
Operating and storage conditions		
Working temperature range	° C	- 20 ~ 50
Storage temperature range	° C	- 50 ~ 80
Maximum temperature enclosure	° C	55
Allowable humidity	%	5 ~ 95% (no condensation)
Degree of protection		IP00
Safety		
Insulation		yes
Breakdown voltage AC (input output), (input ground), (output ground)	KW	$\leq 2, 0$
Insulation resistance between conductive part and shell	MΩ	≥ 200
Standard		
Electromagnetic compatibility (electromagnetic stability)		–
Others		
Mean time to failure (MTBF) (85 ° C)	Hours	50000
Overall dimension (length x width x height)	mm	L117*W34*H26
Weight	kg	0. 13kg

– The main parameters of the product are measured under 220V power supply voltage, full load of power output and 25 ° C ambient temperature.

Power factor characteristics(load 85Vdc)

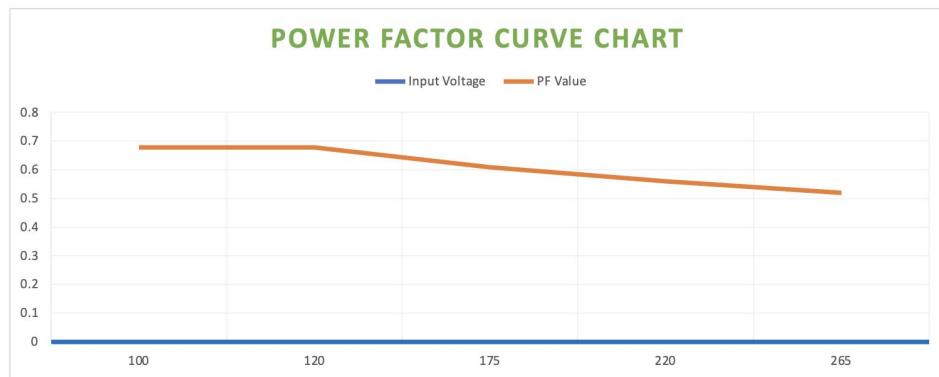

Efficiency characteristics(Input Voltage 220Vac)

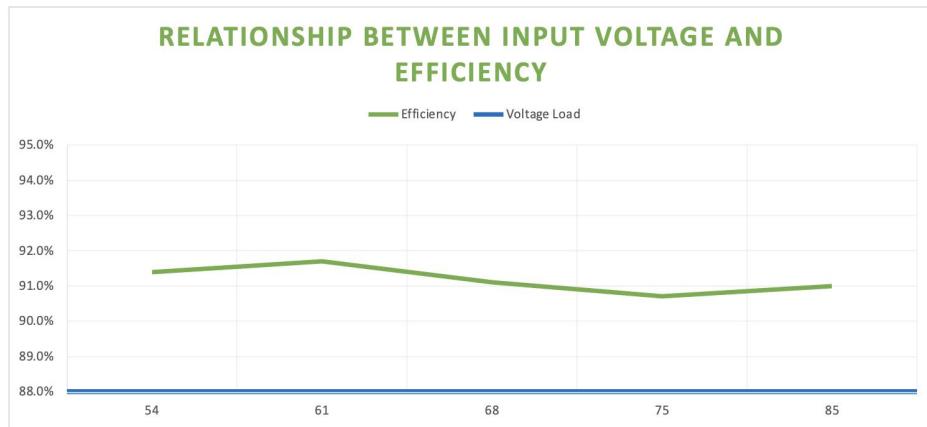

hone : +7 495 369-20-39

Website : www.minifermer.ru

Email : info@minifermer.ru