

## LED DRIVER PC-D42

**50w 600mA**



### Characteristic


- Galvanic Isolation
- Efficiency > 90%
- Power - 50W
- Ripple <2%

### Technical Parameter


Input characteristic		
Input Voltage Range	V	100–260
Power consumption range	W	35–55
Frequency	Hz	50–60
Power factor correction (λ, AC 220V)	%	0.5
Efficiency	%	91%
Input Current (AC230V 50–60Hz)	A	<0.5
Output characteristic		
Output current regulation (dimming)		No
Dimming characteristic linearity	%	–
Output current tolerance	%	<5%
Output Ripple	%	<2%
Current	mA	600
Power	W	20
Voltage	V	54–85
No load voltage	V	90
Protection		
Short circuit protection		yes
Oversupply protection		yes
Overload protection		yes
Operating and storage conditions		
Working temperature range	° C	- 20 ~ 50
Storage temperature range	° C	- 50 ~ 80
Maximum temperature enclosure	° C	75
Allowable humidity	%	5 ~ 95% (no condensation)
Degree of protection		IP20
Safety		
Insulation		yes
Breakdown voltage AC (input output), (input ground), (output ground)	KW	≤ 2,0
Insulation resistance between conductive part and shell	MΩ	≥ 200
Standard		
Electromagnetic compatibility (electromagnetic stability)		–
Others		
Mean time to failure (MTBF) (85 ° C)	Hours	50000
Overall dimension (length x width x height)	mm	L105*W47*H30.5
Weight	kg	0.09kg

– The main parameters of the product are measured under 220V power supply voltage, full load of power output and 25 ° C ambient temperature.

**Power factor characteristics(load 85Vdc)**

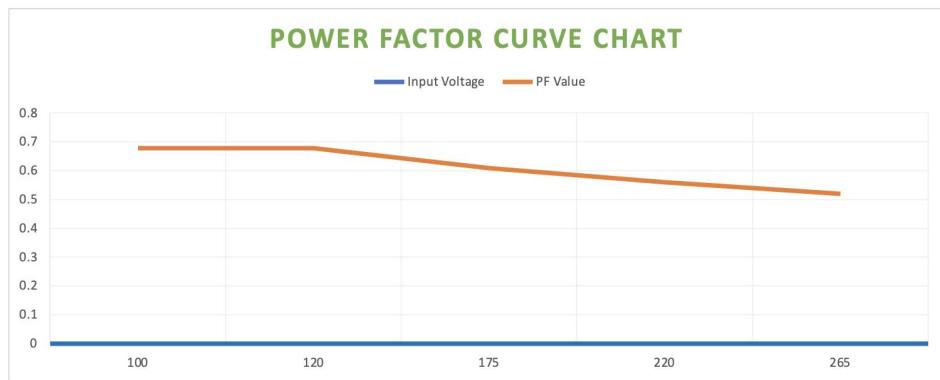

**Efficiency characteristics( Input Voltage 220Vac)**

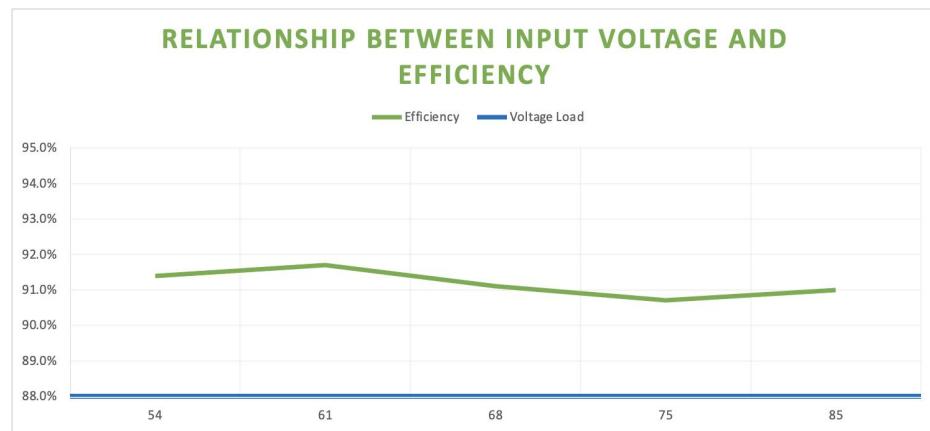

Phone : +7 495 369-20-39

Website : [www.minifermer.ru](http://www.minifermer.ru)

Email : [info@minifermer.ru](mailto:info@minifermer.ru)